
Before using this unit, carefully read the sections entitled: "Connection Precautions" and "Battery Swap Manual"


#### **Main Features**

- Overdrive pedal inspired by the legendary Dumble amplifier.
- Offers two iconic voicings:
  - \*ODS (Overdrive Special): Smooth, singing overdrive with minimal harshness
  - \*SSS (Steel String Singer): High dynamic headroom with a rounded, articulate clean tone

## **Panel Description**

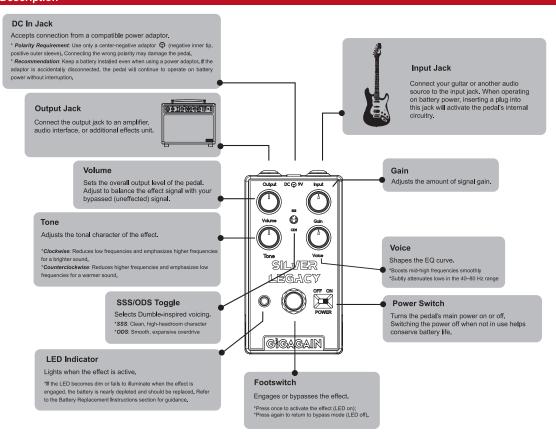

# **Battery Swap Manual**



- 1. Parallelly draw out battery compartment.
- 2. Remove old battery, disconnect battery buckle clip.
- 3. Carefully observe the battery polarity (+ and -) before connecting the battery buckle clip. Connect new battery with battery buckle clip, put new battery in the compartment.
- 4. Parallelly draw in battery compartment, the magnet will help attach on the body.
- ${}^{\star}\textit{Tip}$ : you can store your picks and other small stuff in the compartment.

#### **Connection Precautions**

- Lower the volume and disconnect power to prevent misuse and equipment failure.
- Once the connections are correctly finished, please follow the subsequent steps to turn the power back on. Failure to do so may result in misuse or equipment failure
  - \* To power on: Connect the guitar amplifier to power
  - \*To power off: Disconnect the guitar amplifier from power first.
- When the unit is powered ON, the indicator light displays the effect's current status:
- \*Indicator ON: Effect is active.
  \*Indicator OFF: The unit is in bypass mode.

## **Battery Usage**

This unit does not include a battery. Please use a 9V battery or an optional compatible power adaptor.

SILVER LEGAC

- If the battery power is low, the sound may become distorted. This is normal and does not indicate a malfunction. Replace the battery or connect a power adaptor.
- Always lower the volume before turning the pedal on or off. Some noise may still be heard during switching; this is normal and does not indicate a fault.
- When operating on battery power, a dim indicator light means the battery is nearly depleted.
- Replace it promptly to avoid signal interruption.
   To prevent unnecessary battery drain, switch the pedal off when not in use.

## **Main Specifications**

Maximum Gain	+30dB	Power Supply	Carbon Battery (9 V, 6F22) Alkaline Battery (9 V, 6LR51) Power Adapter (self-supplied) 9V Rechargeable Battery (GIGAGAIN MIB09, sold separately)
Maximum Output Level	0dBu		
Input Impedance	1ΜΩ		
Output Impedance	10ΚΩ	Dimensions	116*63*37 (mm)
Current Draw	About 10mA	Weight	300g
Recommended Load Impedance	10KΩ or larger	Options (sold separately)	9VRechargeable Battery (GIGAGAIN MIB09)

<sup>\*0</sup> dBu = 0,775 Vrms

<sup>\*</sup>This manual describes the product specifications at the time of the manual's release. For the latest information, please visit gigagainaudio.com.